

AgriDeck CC

Modular concrete in fill
weighbridge



AgriDeck CC

The **Agrideck CC** weighbridge is an ideal solution for weighing motor vehicles and work trucks up to a maximum of 80 tons.

The design allows for easy of transport, handling and assembly, the isostatic type of structure with separate modules guarantees smooth operation over time, even if the foundations settle naturally.

The compactness of the profile allows the deck to be pit mounted and can be installed in a foundation of only 50 cm high, or a surface mounted version to be installed with the ramps being only 40 cm high.

The measuring system consists of a number of stainless steel compression load cells analogue version.

The electronic terminal that completes the weighing system with peripheral accessories, manages the display of the weight and any supplementary functions.

Types of materials, treatments used, design features and range of accessories and customisations: these characteristics allow the **Agrideck CC** weighbridge to be one of the most versatile and high quality products available on the market.

PRODUCT **ADVANTAGES**

- Easily transported
- High resistance to the chemicals and oils
- High resistance to oxidation
- Installation versatility
- Multirange for the most advantageous minimum division in relation to the capacity
- The concrete is cast directly in the weighing platform without the need for additional shuttering

SUPPLY

- The supply includes all the reinforcement required for the concrete cast
- 1.5 m wide semi panels complete with a lower closing plate
- Electrowelded mesh

THE CASTING OF THE CONCRETE IS EXCLUDED FROM THE SUPPLY

RECOMMENDED **APPLICATIONS**

- Surface mounted installation
- Pit mounted installation for environments with high operating frequency

SPECIFIC **ACCESSORIES**

- MULTI-RANGE Version
- ATEX Version (for environments at risk of explosion)
- Electronic terminals and printers
- Frame for ramps made of compacted material
- Customised structure colour
- Peripheral electronic accessories



CONCRETE CHARACTERISTICS

CASTING THE CONCRETE WHEN SETTING UP THE WEIGHBRIDGE ($R_{bk} > 35\text{N/mm}^2$)

- Portland 325-type of cement, measured at 4.5 quintals/cubic metre of concrete,
- water/cement ratio equal to 0.5
- continuous particle size with aggregate max diameter 35 mm
- STABIL MAC-type of expansive additive measured at 20 kg/cubic metre of concrete
- MVR-type of anti-freeze air entrainer, measured at

60 cc/quintal of concrete

- addition of synthetic fibres, such as FIBER MESH, to the mixture at the rate of 1 kg/cubic metre
- dusting the surface of the cast concrete with spheroidal quartz max diameter 1 mm, measured at 3 kg/sq m of weighbridge surface
- the surface of the cast concrete must have slight convexity in mid-air (about 1 cm) in order to facilitate water drainage



Modular concrete in fill weighbridge


STANDARD DIMENSIONS AND FEATURES

Models available	Platform length (m)	Platform width (m)	Number of loading cells	Maximum capacity (t)	Divisions (kg)	Cubic metres of Cement
AgriDeck CC 93 4	9,56	3	6	40	10	6,5
AgriDeck CC 143 6	14,00	3	8	60	20	9,7
AgriDeck CC 183 6	18,00	3	8	60	20	12,6
AgriDeck CC 183 8	18,00	3	8	80	20	12,6


(**) MULTIRANGE (OPTIONAL) - (ANALOGUE VERSION)

Capacity (t)	Capacity (t)	Divisions (kg)	Capacity (t)	Divisions (kg)	Capacity (t)	Divisions (kg)
40	0 to 15	5	15 to 30	10	30 to 40	20
60	0 to 30	10	30 to 60	20		
80	0 to 30	10	30 to 60	20	60 to 80	20

SURFACE MOUNTED

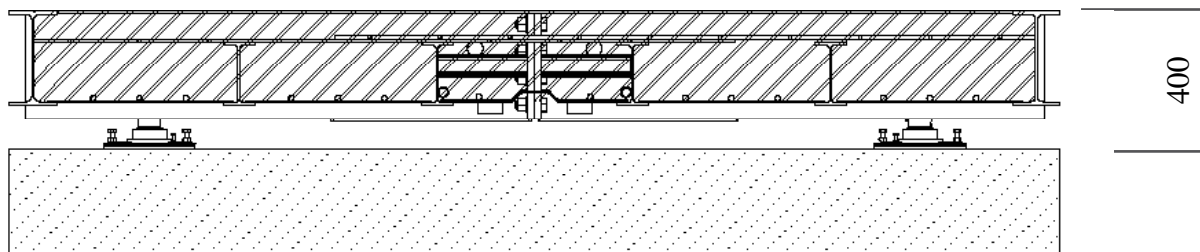

PIT MOUNTED

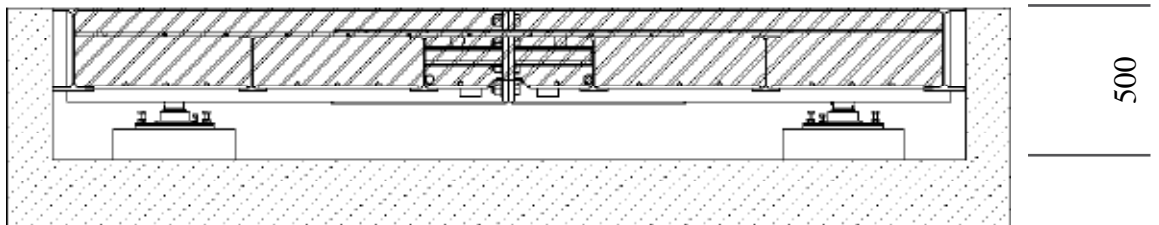

www.parkerfarm.com
Freephone: 0808 178 2513

HEAD OFFICE
 Titan Works, Bridge Way
 Chesterfield Trading Estate
 Chesterfield S41 9QJ
 T: 01246 456729

SOUTH WEST OFFICE
 Unit 4B Block 4, Westpark
 Chelston, Wellington
 Somerset TA21 9AD
 T: 01823 662355



ISO 14001
 ISO 9001:2015



FM 584346
 EMS 668186

The company reserves the right to make changes to the products in the photographs above, at any time and without prior notice, in order to improve them from a technological aspect.