


PRM-CX

**STAINLESS STEEL FLOOR SCALE
FOR HARSH ENVIRMENTS AND HEAVY DUTY**



Detail of load cell mounting

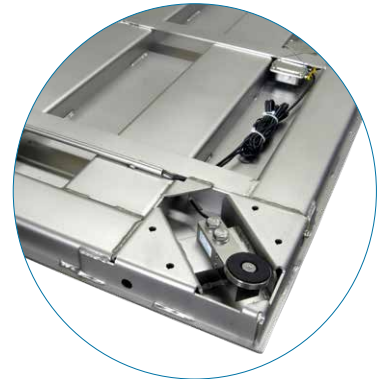

STRENGTHS

MICROBEAD BLASTED AISI 304 STAINLESS STEEL STRUCTURE, WITH THICK AND SMOOTH METAL


4 IP67 STAINLESS STEEL LOAD CELLS, IP68 STAINLESS STEEL JUNCTION BOX WITH ANTI-CONDENSATION SYSTEM

PIT OR SURFACE MOUNTING

WIDE RANGE OF SIZES AND CAPACITIES

- Capacity up to 8.000 kg
- Connection cables shielding with stainless steel pipes
- Diagonal load cell mounting arrangement to ensure optimum performance
- Versions with customised dimensions and capacity and AISI 316 stainless steel version upon request
- Integrated solutions with indicators and software
- Custom cable length

PRM-CX

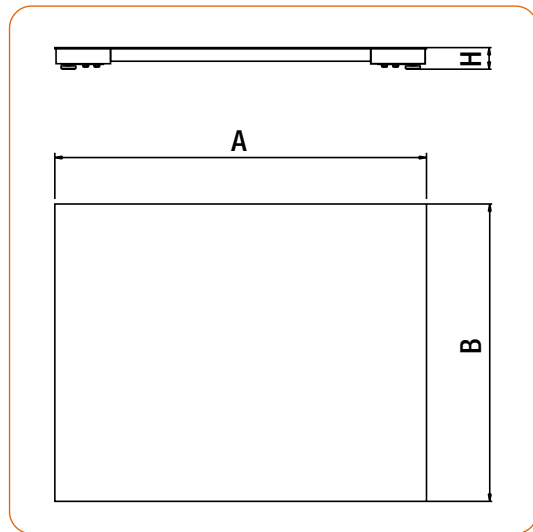

TECHNICAL DATA

MODEL

PRM-CX

Dimensions	Height	Weight	Multirange (approved)		High resolution	
A x B (mm)	H (mm)	(kg)	Capacity (kg)	Div. (kg)	Capacity (kg)	Div. (kg)
1000 x 1000	90	110	150 / 300	0,05 / 0,1	300	0,02
1000 x 1000	90	110	600 / 1500 / 2000	0,2 / 0,5 / 1	2000	0,1
1250 x 1250	90	136	300 / 600	0,1 / 0,2	600	0,05
1250 x 1250	90	136	600 / 1500 / 2000	0,2 / 0,5 / 1	2000	0,1
1500 x 1250	90	158	600 / 1500 / 2000	0,2 / 0,5 / 1	2000	0,1
1500 x 1250	90	158	1500 / 3000	0,5 / 1	3000	0,2
1500 x 1500	90	172	600 / 1500 / 2000	0,2 / 0,5 / 1	2000	0,1
1500 x 1500	90	172	1500 / 3000	0,5 / 1	3000	0,2
2000 x 1500	90	252	600 / 1500 / 2000	0,2 / 0,5 / 1	2000	0,1
2000 x 1500	90	252	1500 / 3000	0,5 / 1	3000	0,2
2000 x 1500	130	340	8000	2	8000	0,5
2500 x 1500	90	320	1500 / 3000	0,5 / 1	3000	0,2
2500 x 1500	130	530	8000	2	8000	0,5

OPTIONS

- AISI 304 stainless steel surround frame for pit mounted version (H 100 -140 mm)
- Access ramps in AISI 304 stainless steel L = 900 mm (mm 1300 for capacity 8000 kg)
- Calibration report for quality assurance compliance
- ATEX version for use in hazardous area applications

Agent / Dealer

HEAD OFFICE
Titan Works, Bridge Way
Chesterfield Trading Estate
Chesterfield
S41 9QJ

T: 0808 1967778

SOUTH WEST OFFICE
Unit 4B Block 4,
Westpark Chelston,
Wellington Somerset
TA21 9AD

T: 01823 662355

www.parkerfarm.com
sales@parkerfarm.com
Freephone :
Sales: 0808 1967778
Service: 0808 5015558

PARKERFARM 
WEIGHING SYSTEMS