


PRM-A

OPENABLE STAINLESS STEEL FLOOR SCALE, FOR AGGRESSIVE ENVIRONMENTS WITH FREQUENT WASHING



AISI-316 stainless steel gas struts

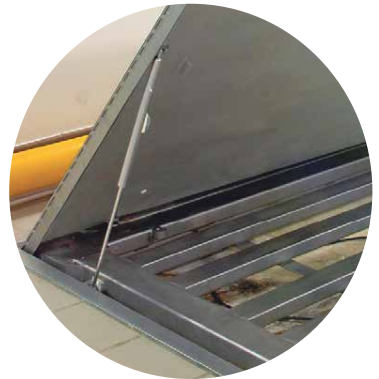

STRENGTHS

OPENABLE SURFACE TO FACILITATE OPERATIONS OF SANITISATION


MICROBEAD BLASTED AISI 304 STAINLESS STEEL STRUCTURE, WITH THICK AND SMOOTH SURFACE

4 IP67 STAINLESS STEEL LOAD CELLS, IP68 STAINLESS STEEL JUNCTION BOX WITH ANTI-CONDENSATION SYSTEM

PIT OR SURFACE MOUNTING

- *Capacity up to 2.000 kg*
- *Weighing top in very thick smooth sheet steel suitable for transit of trucks and pallet trucks*
- *Connection cables shielding with stainless steel pipes*
- *Versions with customised dimensions and capacity and AISI 316 stainless steel version upon request*
- *Integrated solutions with indicators and software*
- *Custom cable length*

PRM-A

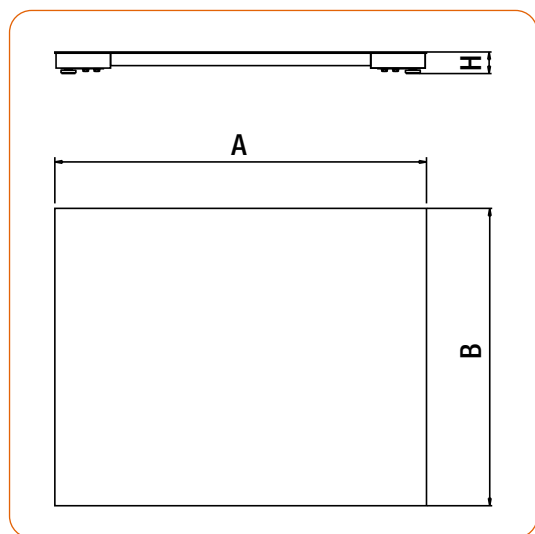

TECHNICAL DATA

MODEL

PRM-A

Dimensions	Height	Weight	Multirange (approved)		High resolution	
A x B (mm)	H (mm)	(kg)	Capacity (kg)	Div. (kg)	Capacity (kg)	Div. (kg)
1500 x 1250	90	215	600 / 1500 / 2000	0,2 / 0,5 / 1	2000	0,1
2000 x 1250	90	280	600 / 1500 / 2000	0,2 / 0,5 / 1	2000	0,1

OPTIONS

- AISI 316 stainless steel version
- Containment frame for pit mounted version H 100 mm
- Slip-resistant ramps L = 900 mm
- ATEX version for use in designated hazardous areas
- Calibration report for quality assurance compliance



HEAD OFFICE
Titan Works, Bridge Way
Chesterfield Trading Estate
Chesterfield
S41 9QJ

T: 0808 1967778

SOUTH WEST OFFICE
Unit 4B Block 4,
Westpark Chelston,
Wellington Somerset
TA21 9AD

T: 01823 662355

www.parkerfarm.com
sales@parkerfarm.com
Freephone :
Sales: 0808 1967778
Service: 0808 5015558

PARKERFARM
WEIGHING SYSTEMS

Agent / Dealer